


# DATACENTER SOLUTIONS CHEAT SHEET

Tripp Lite manufactures over 3,000 cost-effective, vendor-neutral IT infrastructure products, including UPS systems, racks, cooling, PDUs, KVM console servers and switches, cables and cable management accessories, so you can maximize the availability, manageability and efficiency of your data center.

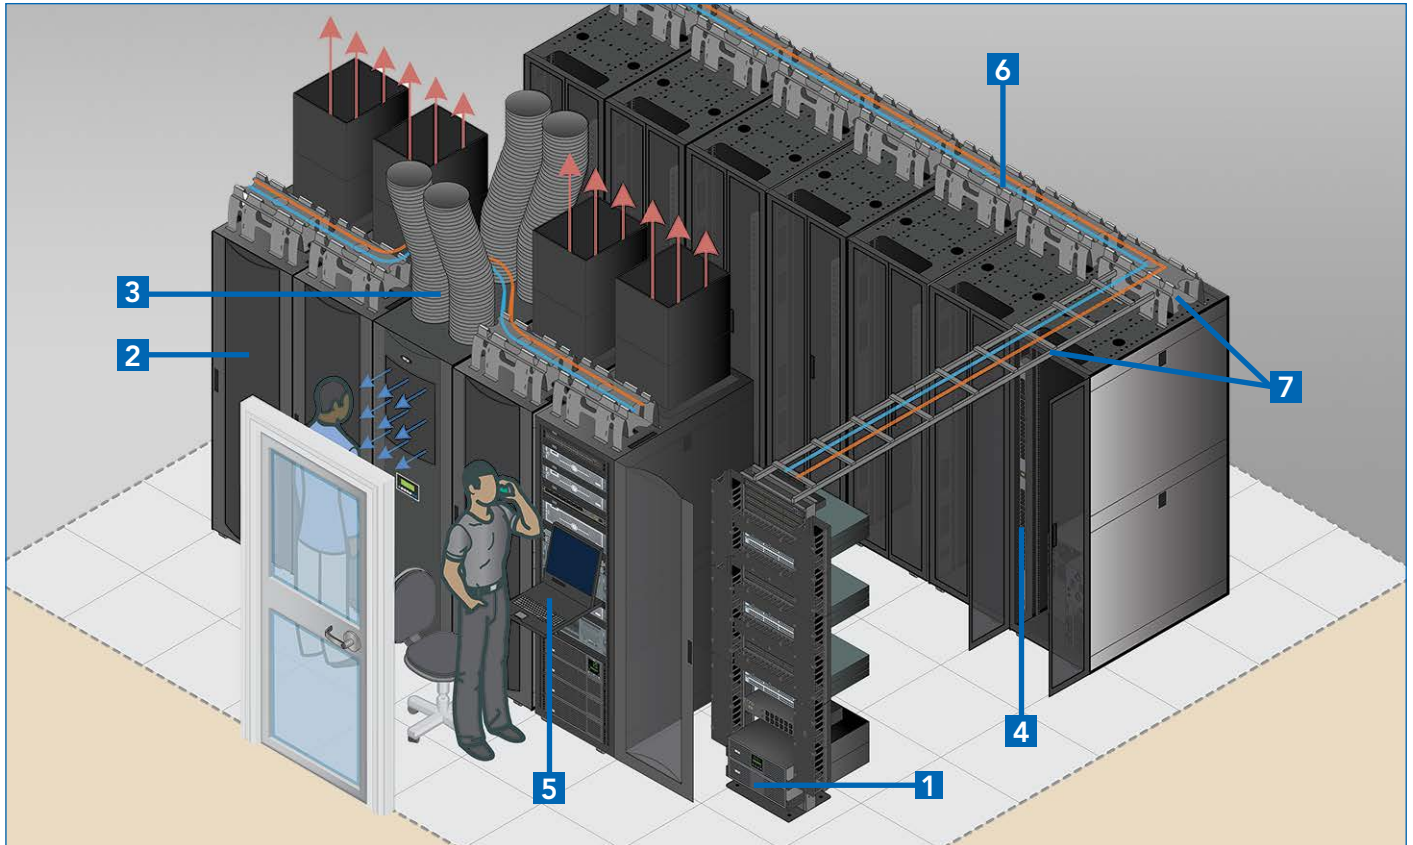

## 1 UPS SYSTEMS

- Single-phase and 3-phase models up to 120 kVA (480 kVA in parallel)
- Highly efficient operation, scalable runtime and pure sine wave output

## 2 RACKS

- EIA-compliant open frame racks, enclosures and wall-mount cabinets from 5U to 48U
- Toolless PDU mounting
- Capacities up to 3,000 lb.

## 3 COOLING

- Close-coupled computer room air conditioners for portable, row-based or in-rack cooling applications
- Remote monitoring and management of environmental conditions with SNMPWEBCARD accessory

## 4 NETWORK-GRADE PDUs

- Single-phase or 3-phase input with load capacities up to 27.6 kW
- Available load metering, individual outlet control and network management

## 5 KVM CONSOLES AND SWITCHES

- Up to 32 KVM ports per 1U
- Available IP remote access, foldaway LCDs, serial access and out-of-band management

## 6 CABLES

- Copper and fiber network patch cables and connectors
- Power and storage cables

## 7 CABLE MANAGEMENT ACCESSORIES

- Cable troughs and cable ladders
- Patch panels and high-density cable managers
- High-density modular fiber patch panels with media conversion



# TRIPP LITE DATA CENTER SOLUTIONS

## UPS SYSTEMS

Tripp Lite Model	Output Capacity	Outlets + Ports
<b>SmartPro® Rackmount UPS Systems—Advanced protection for servers</b>		
SMART500RT1U	500VA/300W	7+USB+DB9
SMART750RM1U	750VA/600W	6+USB+DB9
SMART750RMXL2U	750VA/600W	6+USB+DB9
SMART1000RM1U	1000VA/800W	6+USB+DB9
SMART1000RM2U	1000VA/800W	6+USB+DB9
SMART1000RMXL2U	1000VA/900W	8+USB+DB9
SMART1500RM2U	1500VA/1350W	8+USB+DB9
SMART1500RMXL2UA	1500VA/1350W	8+USB+DB9
SMART2200RM2U	2200VA/1920W	8+USB+DB9
SMART2200RMXL2U	2200VA/1920W	8+USB+DB9
SMART2600RM2U	2600VA/1920W	9+USB+DB9
SMART3000RM2U	3000VA/2250W	9+USB+DB9
SMART3000RMXL2U	3000VA/2880W	9+USB+DB9
SMART5000RT3U	5000VA/4000W	14+(2) USB+(2) DB9

<b>SmartOnline® Rackmount UPS Systems—Ideal for mission-critical equipment</b>		
SU750RTL2U	750VA/600W	6+tel/Ethernet+USB+DB9
SU750RTLXCD2U	750VA/675W	6+tel/Ethernet+USB+DB9
SU1000RTL2UA	1000VA/800W	6+tel/Ethernet+USB+DB9
SU1000RTLXCD2U	1000VA/900W	6+tel/Ethernet+USB+DB9
SU1500RTL2UA	1500VA/1200W	6+tel/Ethernet+USB+DB9
SU1500RTLXCD2U	1500VA/1350W	6+tel/Ethernet+USB+DB9
SU2200RTL2UA	2200VA/1600W	7+tel/Ethernet+USB+DB9
SU2200RTLXCD2U	2200VA/1800W	7+tel/DSL+USB+DB9
SU3000RTL2U	3000VA/2500W	7+tel/Ethernet+USB+DB9
SU3000RTL3U	3000VA/2400W	9+tel/Ethernet+USB+DB9
SU3000RTL3UHV	3000VA/2400W	8+DB9
SU3000RTLX3U	3000VA/2400W	9+tel/Ethernet+USB+DB9
SU3000RTLXCD3U	3000VA/2700W	9+tel/Ethernet+USB+DB9
SU5000RT3U	5000VA/3500W	16+(2) DB9
SU5000RT3UHV	5000VA/3500W	4+(2) DB9
SU5000RT4U	5000VA/4500W	12+USB+DB9
SU5000RT4UHV	5000VA/4500W	4+USB+DB9
SU5000RT4UTF	5000VA/4500W	16+USB+DB9
SU6000RT3U	6000VA/4200W	Hardwire+(2) DB9
SU6000RT4U	6000VA/4200W	12+USB+DB9
SU6000RT4UHV	6000VA/5400W	4+USB+DB9
SU6000RT4UHVHV	6000VA/5400W	Hardwire+USB+DB9
SU6000RT4UTF	6000VA/5400W	16+USB+DB9
SU6000RT4UTFHW	6000VA/5400W	13+Hardwire+USB+DB9
SU8000RT3U	8000VA/7200W	6+USB+DB9
SU8000RT3U1TF	8000VA/7200W	18+USB+DB9
SU8000RT4U	8000VA/5600W	8+Hardwire+USB+DB9
SU10000RT3U	10,000VA/9000W	6+USB+(2) DB9
SU10000RT3U2TF	10,000VA/9000W	30+USB+(2) DB9
SU10KRT3U	10,000VA/9000W	Hardwire+USB+(2) DB9
SU10KRT3UHV	10,000VA/9000W	Hardwire+USB+(2) DB9
SU12000RT4U	12,000VA/8400W	13+Hardwire+USB+DB9
SU16000RT4U	16,000VA/11,200W	13+Hardwire+USB+DB9

## POWER DISTRIBUTION UNITS (PDUS)

Tripp Lite Model	Mounting	Nominal Voltage	Input Type/Plug	Outlet (Qty.) Type
<b>Basic</b>				
PDU1215	Horiz./Vert.	120V	5-15P	(13) 5-15R
PDU1220	Horiz./Vert.	120V	5-20P	(13) 5-15/20R
PDU1230	Horiz./Vert.	208/240V	L6-30P	(4) C19, (16) C13
PDU2430	Horiz./Vert.	120V	L5-30P	(24) 5-15R
PDUV30HV	Vertical	208/240V	L6-30P	(6) C19, (32) C13
<b>Metered</b>				
PDUMH15AT (ATS)	Horizontal	120V	2 x 5-15P	(8) 5-15R
PDUMH20AT (ATS)	Horizontal	120V	2 x 5-20P, L5-20P	(16) 5-15/20R
PDUMV30	Vertical	120V	L5-30P	(24) 5-15/20R
<b>Monitored</b>				
PDUMNH15	Horizontal	120V	5-15P	(8) 5-15R
PDUMNH30HV	Horizontal	208/240V	L6-30P	(4) C19, (12) C13
PDUMNV30	Vertical	120V	L5-30P	(24) 5-15/20R (2 20A breaker banks)
PDUMNV30HV2	Vertical	208/240V	L6-30P	(6) C19, (36) C13
<b>Switched</b>				
PDUMH15NET	Horizontal	120V	5-15P	(16) 5-15R
PDUMH20HVNET	Horizontal	200-240V	C20	(8) C13
PDUMH20HVATNET (ATS)	Horizontal	200-240V	2 x IEC-320-C20	(8) C13, (2) C19
PDUMH30HVNET	Horizontal	208/240V	L6-30P	(16) C13
PDUMH30HVATNET (ATS)	Horizontal	208/240V	2 x L6-30P	(16) C13, (2) C19, (1) L6-30R
PDUMV20NET	Vertical	120V	L5-20P with 5-20P adapter	(24) 5-15/20R
PDUMV20HVNET	Vertical	200-240V	L6-20P (detachable via C20 inlet)	(4) C19, (20) C13
PDUMV30NET	Vertical	120V	L5-30P	(24) 5-15/20R

## RACK ENCLOSURES AND OPEN FRAME RACKS

Tripp Lite Model	Size	Type	Capacity
<b>Enclosures</b>			
SR12UB	12U	Extended Depth	1,000 lb.
SR18UB	18U	Extended Depth	1,000 lb.
SR25UB	25U	Standard	3,000 lb.
SR42UB	42U	Standard	3,000 lb.
SR42UBDP	42U	Extended Depth	3,000 lb.
SR42UBWD	42U	Extended Width	3,000 lb.
SR45UB	45U	Standard	3,000 lb.
SR48UB	48U	Standard	3,000 lb.
<b>Wall-Mount Enclosures</b>			
SRWF5U	5U	Low-Profile	150 lb.
SRW6U	6U	Non-Swinging	200 lb.
SRW9U	9U	Non-Swinging	200 lb.
SRW10US	10U	Swinging	200 lb.
SRW12U	12U	Non-Swinging	200 lb.
SRW12US	12U	Swinging	200 lb.
SRW12U13	12U	Non-Swinging	200 lb.
SRW12US33	12U	Swinging, 33" Depth	250 lb.
SRW12USG	12U	Swinging, Glass Door	200 lb.
SRW18US	18U	Swinging, Heavy-Duty	250 lb.
SRW26US	26U	Swinging, Heavy-Duty	250 lb.
<b>Open Frame Racks</b>			
SR2POST	45U	2-Post Rack	800 lb.
SR2POST25	25U	2-Post Rack	800 lb.
SR4POST	45U	4-Post Rack	1,000 lb.
SR4POST13	13U	4-Post Rack	1,000 lb.
SR42UBXPND	42U	4-Post Rack, Heavy-Duty	3,000 lb.

## COOLING SOLUTIONS

Tripp Lite Model	Description
SRCOOL12K	Portable Air-Conditioning Unit, 12,000 BTU, 120V, 60Hz
SRCOOLNET	Web card for remote cooling management and monitoring of SRCOOL12K
SRCOOL33K	Row-Based Air-Conditioning Unit, 33,000 BTU, 200-240V, 50/60Hz

## CABLE MANAGEMENT ACCESSORIES

Tripp Lite Model	Description
SRCABLEDUCT1U	1U Horizontal Cable Manager (Finger duct with cover)
SRCABLEDUCT1UHD	1U Horizontal Cable Manager (Finger duct with dual-hinged cover)
SRCABLELADDER	10 ft. x 1 ft. Cable Ladder (Includes two sections; requires SRCABLETRAY for connection to enclosure; requires SRLADDERATTACH for connection to wall or open frame rack)
SRCABLETRAY	Roof-Mounted Cable Trough (Routes cable and separates power/data cables)
SRCABLEVRT3	High-Capacity Vertical Cable Manager (3 in. wide, double finger duct with cover, toolless mounting)

## KVM CONSOLES AND SWITCHES

Tripp Lite Model	Description
<b>1U Rackmount Console KVM Switches</b>	
B020-008-17	8-Port w/17" LCD
B020-016-17	16-Port w/17" LCD
B020-016-17-IP	16-Port w/17" LCD and IP Remote Access
B020-U08-19-IP	8-Port w/19" LCD and IP Remote Access
B020-U08-19-K	8-Port w/19" LCD and 8 PS2/USB Combo Cables
B020-U16-19-K	16-Port w/19" LCD and 8 PS2/USB Combo Cables
B040-008-19	8-Port w/19" LCD
B040-016-19	16-Port w/19" LCD
B070-008-19	8-Port w/19" LCD
B070-016-19	16-Port w/19" LCD
B070-016-19-IP	16-Port w/19" LCD and IP Remote Access
<b>1U Rackmount Consoles</b>	
B021-000-17	w/17" LCD
B021-000-19	w/19" LCD
<b>1U Rackmount Serial Console Server</b>	
B096-016	IP Remote Access
<b>1U Rackmount Cat5 KVM Switches</b>	
B072-008-1	8-Port
B072-016-1	16-Port
B072-016-IP4	16-Port with IP Remote Access
B072-032-IP4	32-Port with IP Remote Access
B064-032-04-IPG	32-Port with IP Remote Access
<b>1U Rackmount Basic USB/PS2 KVM Switches</b>	
B022-U08-IP	8-Port with IP Remote Access
B042-004	4-Port w/On-Screen Display
B042-008	8-Port w/On-Screen Display
B042-016	16-Port w/On-Screen Display

## CAT5E/6 CABLES

Length	Gray	Blue
3 ft.	N002-003-GY	N002-003-BL
5 ft.	N002-005-GY	N002-005-BL
7 ft.	N002-007-GY	N002-007-BL
10 ft.	N002-010-GY	N002-010-BL
14 ft.	N002-014-GY	N002-014-BL
25 ft.	N002-025-GY	N002-025-BL
50 ft.	N002-050-GY	N002-050-BL
100 ft.	N002-100-GY	N002-100-BL
Length	Black	Green
3 ft.	N002-003-BK	N002-003-GN
5 ft.	N002-005-BK	N002-005-GN
7 ft.	N002-007-BK	N002-007-GN
10 ft.	N002-010-BK	N002-010-GN
14 ft.	N002-014-BK	N002-014-GN
25 ft.	N002-025-BK	N002-025-GN
50 ft.	N002-050-BK	Inquire
100 ft.	N002-100-BK	Inquire

## CAT6 CABLES

Length	Black	Blue
3 ft.	N201-003-BK	N201-003-BL
7 ft.	N201-007-BK	N201-007-BL
10 ft.	N201-010-BK	N201-010-BL
14 ft.	N201-014-BK	N201-014-BL
25 ft.	N201-025-BK	N201-025-BL
50 ft.	N201-050-BK	N201-050-BL
100 ft.	N201-100-BK	N201-100-BL

For More Information, Contact:  
**Tech Data Pre-Sales Tech Support**  
 773.869.1TD1 • techdata@tripltel.com

